



Pro Series

PRO 5x Cardioid Dynamic Microphone



- Professional performance for general stage use
- Tailored response provides natural, full-range sound reproduction
- Oversize ball-type multistage windscreen
- On/off switch and professional 3-pin output connector
- Includes 20' (6.1 m) cable with XLR-type connectors

PRO 5x Specifications

Element

Dynamic

Polar Pattern

Cardioid

Frequency Response

60 - 16,000 Hz

Open Circuit Sensitivity

-57 dB (1.4 mV) re 1V at 1 Pa

Accessories Furnished: Stand clamp

Impedance

250 ohms

Switch


On/off

Weight


11.5 oz (328 g)

Output Connector


XLRM-type

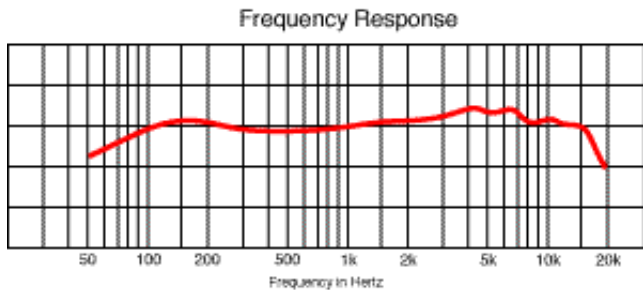

LEGEND — 12" or more on axis



[Conditions and Warranty](#)



[home](#) [site map](#) [alphanumeric](#) [product list](#) [glossary](#)

© 2000 Audio-Technica U.S., Inc.