


**kitpak.**
**KP-STUDIO**

Studio Microphone KitPak™



- Two custom-engineered cardioid condenser studio mics with stand clamps
- Professional, studio-grade performance
- Multistage internal breath shield and on/off switch
- Battery or phantom power operation
- Each KP-STUDIO KitPak™ includes two STUDIO mics, a durable carrying case and one pair of bonus [ATH-M3X](#) stereo headphones



## STUDIO Microphone Specifications

**Element**

Condenser

**Polar Pattern**

Cardioid

**Frequency Response**

100 - 18,000 Hz

**Open Circuit Sensitivity**

-48 dB (3.9 mV) re 1V at 1 Pa

**Impedance**

200 ohms

**Maximum Input Sound Level**

128 dB SPL, 1 kHz at 1% T.H.D.

**Signal-to-noise Ratio**

66 dB, 1 kHz at 1 Pa

**Dynamic Range (Typical)**

100 dB, 1 kHz at Max. SPL

**Phantom Power Requirements**

9-48V, 2 mA typical

**Battery Type**

1.5V AA/UM3

**Battery Current/Life**

1 mA/1000 hours typical

**Switch**

On/off

**Weight (less accessories)**

4.7 oz (132 g)

**Dimensions**

7.94" (201.8 mm) long

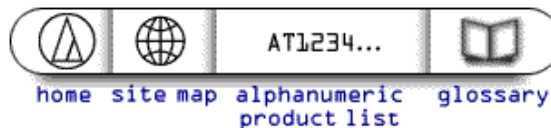
1.53" (38.8 mm) head diameter

**Output Connector**

Integral 3-pin XLRM-type

**Accessories Furnished**

Stand clamp, windscreen, battery

[Conditions and Warranty](#)


© 2000 Audio-Technica U.S., Inc.