



Pro Series

PRO 6L Cardioid Dynamic Microphone



- Ideal for instrumental pickup in live-sound and recording applications
- Wide range and very smooth response
- Uniform pickup pattern at all frequencies
- On/off switch and professional 3-pin output connector
- Includes 20' (6.1 m) cable with XLR-type connectors

PRO 6L Specifications

Element

Dynamic

Impedance

250 ohms

Polar Pattern

Cardioid

Switch

On/off

Frequency Response

65 - 17,000 Hz

Weight

8.6 oz (244 g)


Open Circuit Sensitivity

-56 dB (1.5 mV) re 1V at 1 Pa


Output Connector

XLRM-type

Accessories Furnished: AT8115 foam windscreen; stand clamp; protective pouch

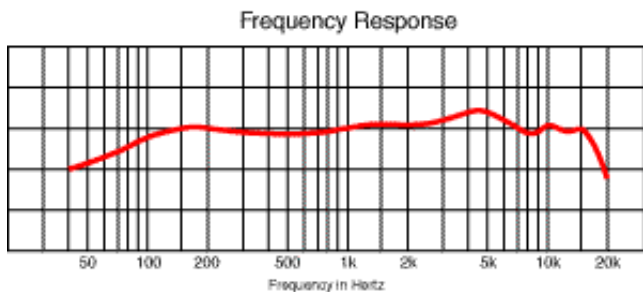


LEGEND — 12" or more on axis



Scale in 2 Decibels Per Division
Legend 1 kHz

[Conditions and Warranty](#)



[home](#) [site map](#) [alphanumeric product list](#) [glossary](#)

© 2000 Audio-Technica U.S., Inc.