



Pro Series

PRO 1a Cardioid Dynamic Microphone



- Versatile performance at a modest price
- Universal impedance for Lo-Z or Hi-Z inputs
- Integral windscreen and on/off switch
- 16.5' (5 m) cable permanently attached between microphone and 1/4" phone plug

PRO 1a Specifications

Element

Dynamic

Polar Pattern

Cardioid

Frequency Response

90 - 13,000 Hz

Open Circuit Sensitivity

-40 dB (10.0 mV) re 1V at 1 Pa

Accessories Furnished: Stand clamp

Impedance

8000 ohms

Switch


On/off

Weight


5.1 oz (145 g)

Output Connector


Integral cable with 1/4" phone plug

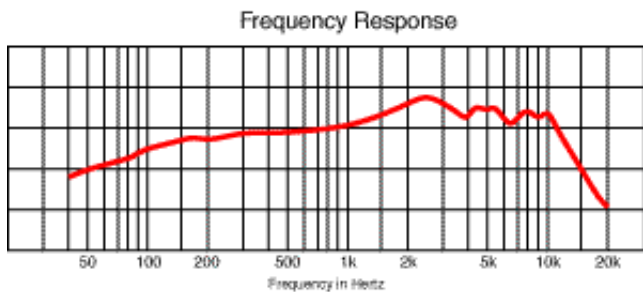

LEGEND — 12" or more on axis

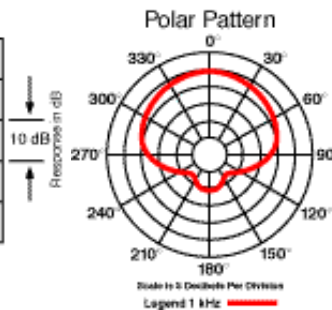

[Conditions and Warranty](#)



[home](#) [site map](#) [alphanumeric](#) [product list](#) [glossary](#)

© 2000 Audio-Technica U.S., Inc.