



**Pro Series**

**PRO 10HE** Hypercardioid Dynamic Microphone



- Ideal for vocal applications and general use
- Very high output minimizes system noise
- Hi-ENERGY® neodymium element
- Superior internal shock mounting reduces handling noise
- On/off switch and professional 3-pin output connector
- Includes 20' (6.1 m) cable with XLR-type connectors

**PRO 10HE Specifications**

**Element**

Neodymium Dynamic

**Polar Pattern**

Hypercardioid

**Frequency Response**

60 - 15,000 Hz

**Open Circuit Sensitivity**

-53 dB (2.2 mV) re 1V at 1 Pa

**Impedance**

600 ohms

**Switch**

On/off


**Weight**

8.6 oz (244 g)


**Output Connector**

XLRM-type

**Accessories Furnished:** Stand clamp; protective pouch

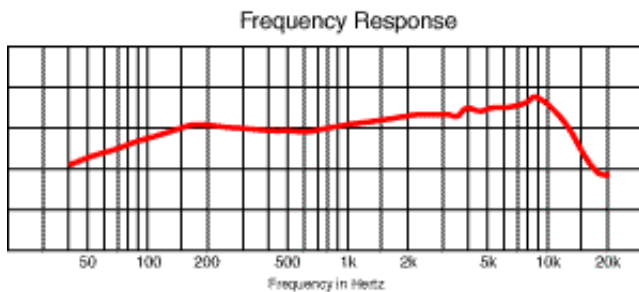


LEGEND ——— 12" or more on axis



Scale to 3 Decibels Per Division  
Legend 1 kHz

[Conditions and Warranty](#)



[home](#) [site map](#) [alphanumeric product list](#) [glossary](#)

© 2000 Audio-Technica U.S., Inc.