



Pro Series

PRO 95 Acoustic Instrument Condenser Microphone



- Designed for pickup of stringed instruments, especially acoustic guitar
- Mounts inside guitar for true sound reproduction and isolation from other instruments
- Sturdy "rubber-grip" spring clamp holds mic securely without marring finish
- Battery-powered in-line power module with on/off switch
- 24' (7.3 m) cable permanently attached between microphone and 1/4" phone plug

PRO 95 Specifications

Element

Condenser

Polar Pattern

Cardioid

Frequency Response

80 - 13,000 Hz

Open Circuit Sensitivity

-40 dB (10.0 mV) re 1V at 1 Pa

Impedance

2000 ohms

Maximum Input Sound Level

105 dB SPL, 1 kHz at 1% T.H.D.

Signal to Noise Ratio

56 dB, 1 kHz at 1 Pa

Accessories Furnished: Windscreen; power module clip; battery; end-pin jack and 1/4" phone plug for guitar

Dynamic Range (Typical)

67 dB, 1 kHz at Max. SPL

Battery Type

1.5V LR44-type

Battery Current/Life

0.4 mA/400 hours typical

Switch

On/off

Weight


3.4 oz (95 g)

Power Module


In-line

Output Connector

1/4 phone plug on cable

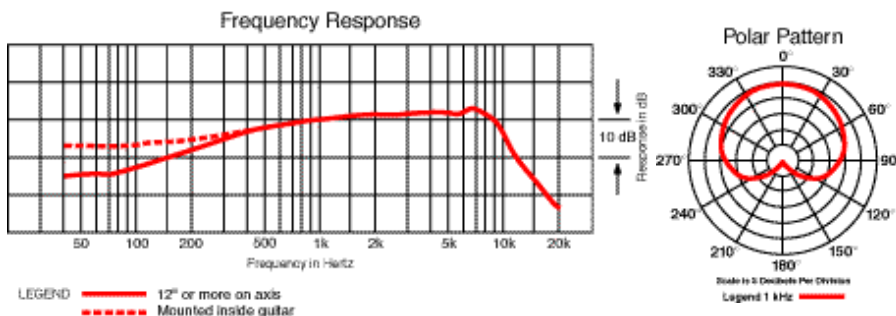

[Conditions and Warranty](#)



[home](#) [site map](#) [alphanumeric product list](#) [glossary](#)

© 2000 Audio-Technica U.S., Inc.